


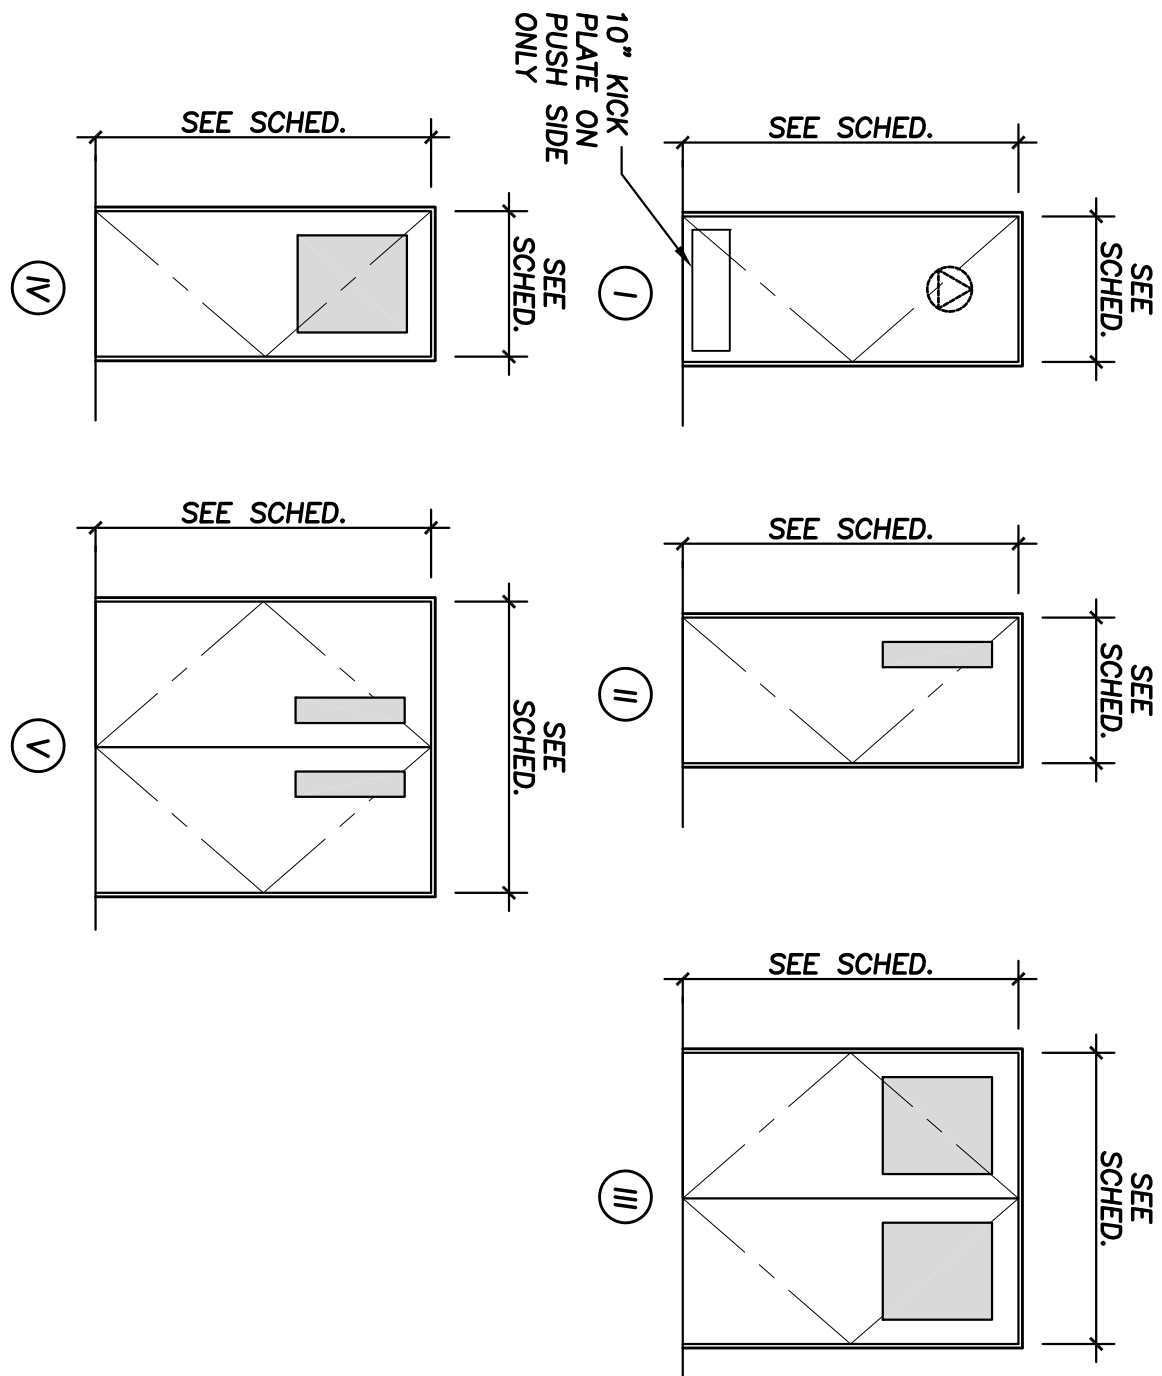

D O O R S C H E D U L E											
DOOR NO.	TYPE	OPENING SIZE		DOOR MATERIAL	FRAME MATERIAL	HDW.	DETAILS			U.L. LABEL	REMARKS
		WIDTH	HEIGHT				HEAD	JAMB	SILL		
①	III	PR 3'-0"	7'-0"	D2	F2	H1 EACH	1 4x10.1	2 2x10.1	3 3x10.1	-	24"x36" WINDOW
②	IV	3'-0"	7'-0"	D2	F2	H1	1 4x10.1	2 2x10.1	3 3x10.1	-	24"x36" WINDOW
③	III	PR 3'-0"	7'-0"	D2	F2	H1 EACH	1 4x10.1	2 2x10.1	3 3x10.1	-	24"x36" WINDOW
④	IV	3'-0"	7'-0"	D1	F1	H2	4 4x10.1	4 4x10.1	5 5x10.1	-	24"x36" WINDOW
⑤	V	PR 3'-0"	7'-0"	D1	F1	H3 EACH	4 4x10.1	4 4x10.1	5 5x10.1	1 1/2	4"x24" WINDOW
⑥	I	3'-0"	7'-0"	D1	F1	H4	4 4x10.1	4 4x10.1	5 5x10.1	-	
⑦	IV	3'-0"	7'-0"	D1	F1	H2	4 4x10.1	4 4x10.1	5 5x10.1	-	24"x36" WINDOW
⑧	II	3'-0"	7'-0"	D1	F1	H3	4 4x10.1	4 4x10.1	5 5x10.1	1 1/2	4"x24" WINDOW

DOOR MATERIAL

- D1 SOLID CORE WOOD
D2 INSULATED 18 GA. HOLLOW METAL DOOR WITH 1/4" SAFETY GLAZING PER SCHEDULE

FRAME MATERIAL

- F1 18 GA. x 1/2" PREFINISHED HOLLOW METAL FRAME
F2 16 GA. HOLLOW METAL DOOR FRAME, EXTERIOR

DOOR GENERAL NOTES

- ALL EXITS ARE TO BE OPERABLE FROM INSIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE.
- ALL DOOR HARDWARE TO COMPLY WITH A.D.A. REQUIREMENTS.
- FOR ALL DOORS VERIFY LOCKING FUNCTIONS AND MASTER KEYING WITH OWNER PRIOR TO INSTALLATION.
- FOR ACCESSIBILITY REQUIREMENTS SEE ACCESSIBILITY SHEETS
- 1 1/2 HOUR FIRE RATED DOORS SHALL HAVE WIRED GLASS OR FIRE PROTECTION RATED GLAZING PER NFPA 80.
- ALL GLAZING IN DOORS AND WINDOWS SHALL BE TEMPERED SAFETY GLAZING
- FIRE RESISTANCE ASSEMBLIES FOR PROTECTION OF OPENING TO COMPLY WITH CBC SECTION 715

HARDWARE SCHEDULE

GROUP #1	GROUP #2	GROUP #3	GROUP #4
1 PANIC HARDWARE 1 1/2 PR. BUTTS, 4 1/2x4 1/2 1 CLOSER 1 STOP 1 SET WEATHER STRIPING 1 THRESHOLD 1 AUTO DOOR BOTTOM	1 LOCKSET/LEVER HANDLE 1 1/2 PR. BUTTS, 4 1/2x4 1/2 1 CLOSER 1 STOP 1 SET SMOKE SEALS 1 AUTO DOOR BOTTOM	1 PANIC HARDWARE 1 1/2 PR. BUTTS, 4 1/2x4 1/2 1 CLOSER 1 STOP 1 SET SMOKE SEALS 1 AUTO DOOR BOTTOM	1 PRIVACY LOCK, LEVER HANDLE 1 1/2 PR. BUTTS, 4 1/2x4 1/2 1 CLOSER 1 KICK PLATE ON PUSH SIDE ONLY

W I N D O W S C H E D U L E


WOW. NO.	TYPE	OPENING SIZE		GLAZING MATERIAL	FRAME MATERIAL	DETAILS			U.L. LABEL	QUANTITY	REMARKS
		WIDTH	HEIGHT			HEAD	JAMB	SILL			
Ⓐ	I	11'-3"	3'-4"	G1	F1	6 4x10.1	7 7x10.1	8 8x10.1	-	1	
Ⓑ	I	22'-6"	3'-4"	G1	F1	6 4x10.1	7 7x10.1	8 8x10.1	-	1	
Ⓒ	II	2'-6"	3'-4"	G1	F1	6 4x10.1	7 7x10.1	8 8x10.1	-	1	
Ⓓ	I	7'-6"	3'-4"	G1	F1	6 4x10.1	7 7x10.1	8 8x10.1	-	1	
Ⓔ	I	7'-6"	3'-4"	G2	F1	9 4x10.1	9 4x10.1	10 10x10.1	1 1/2 HOUR	1	WITH 2 HOUR FIRE SHUTTERS MOUNTED INSIDE CONTROL ROOM
Ⓕ	I	7'-6"	3'-4"	G2	F1	9 4x10.1	9 4x10.1	10 10x10.1	1 1/2 HOUR	1	WITH 2 HOUR FIRE SHUTTERS MOUNTED INSIDE CONTROL ROOM
Ⓖ	I	7'-6"	3'-4"	G2	F1	9 4x10.1	9 4x10.1	10 10x10.1	1 1/2 HOUR	1	WITH 2 HOUR FIRE SHUTTERS MOUNTED INSIDE CONTROL ROOM

WINDOW KEYNOTES

WINDOW MATERIAL

- G1 1" INSULATED GLASS WITH PPG SUPER GREY TINTED OUTER LITE AND INNER LITE CLEAR WITH LOW-E FILM ON THIRD SURFACE
G2 1/2" GLAZING
FRAME MATERIAL
F1 METAL FRAME PER PEMB SUPPLIER

WINDOW TYPES

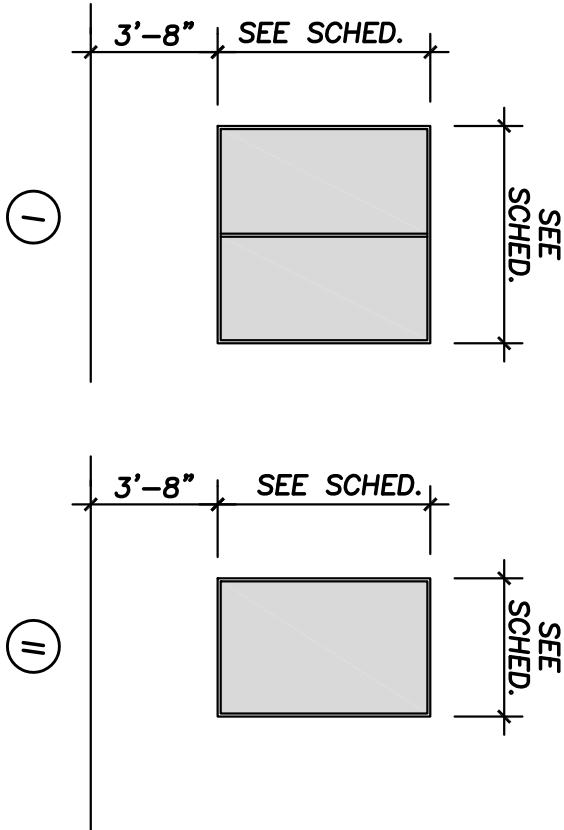

F I N I S H S C H E D U L E

ROOM NO.	ROOM NAME	FLOOR	BASE			WALL FINISH			WALL COVER.			CEILING	REMARKS				
			N	E	S	W	N	E	S	W	N	E		S	W	HT.	FIN.
201	CONTROL ROOM	F1	B2	B2	B2	B2	W1	W1	W1	W1	WC1	WC1	WC1	WC1	9'-0"	C1	NOTE 1
202	DOS ROOM	F1	B2	B2	B2	B2	W1	W1	W1	W1	WC1	WC1	WC1	WC1	9'-0"	C1	NOTE 1
203	COMMUNICATIONS	F1	B2	B2	B2	B2	W1	W1	W1	W1	WC1	WC1	WC1	WC1	9'-0"	C1	NOTE 1
204	BREAK ROOM	F2	B2	B2	B2	B2	W2	W2	W2	W2	WC3	WC3	WC3	WC3	9'-0"	C1	
205	UNISEX RESTROOM	F3	B1	B1	B1	B1	W2	W2	W2	W2	WC2	WC2	WC3	WC2	9'-0"	C2	

NOTE 1 "TATE" ACCESS FLOOR "CONCORE 1250" 24" SQUARE GRID. SEE DETAIL 5/AD1.2

FINISH SCHEDULE KEYNOTES

FLOOR FINSH

- F1 VINYL COMPOSITION STATIC DISSIPATIVE TILES
F2 VINYL COMPOSITION TILES
F3 2" CERAMIC TILE

WALL BASE

- B1 COVERED CERAMIC TILE TO MATCH FLOOR TILE
B2 4" RUBBER TOP SET

WALL FINSH

- W1 3/8" GYPSUM BOARD, FINISH AND PAINT PER SPECIFICATIONS
W2 5/8" WATER RESISTANT GYPSUM BOARD, PAINT AND FINISH PER SPECIFICATIONS

WALL COVERING

- WC1 NONE
WC2 CERAMIC TILE, FULL HEIGHT
WC3 CERAMIC TILE, 48" HIGH

CEILING

- C1 SUSPENDED CEILING WITH ACOUSTICAL PANELS PER SPECIFICATIONS
C2 3/8" GYPSUM BOARD CEILING, TAPED, TOPPED, SANDED SMOOTH AND PAINTED PER SPECIFICATIONS

FINSH GENERAL NOTES

- INTERIOR WALL AND CEILING MATERIALS SHALL NOT EXCEED THE FLAME SPREAD CLASSIFICATIONS IN 2010 IBC SECTION 804, TABLES 8-4 & 8-5
- ALL PAINT FINISHES TO HAVE 1 PRIMER COAT AND 2 FINISH COATS
- ALL DRAPES, HANGING CURTAINS AND ALL OTHER DECORATIVE MATERIALS TO COMPLY WITH FIRE CODE SECTION 1103.3.3
- ALL INTERIOR ARCHITECTURAL PAINTS, COATINGS AND PRIMERS SHALL BE UL LISTED AND APPROVED FOR INTERIOR USE. WOOD FINISHES FLOOR COATINGS, STAINS AND SHELLACS SHALL MEET LEED FOR NEW CONSTRUCTION VERSION 2.2 REQUIREMENTS

REV	DESCRIPTION	BY	JM	-	11.30.11
		DWN	CHK	APP	DATE

LOS ANGELES
DEPARTMENT OF WATER AND POWER

HAYNES GENERATING STATION
UNITS 11-16



Scott Power Engineering
Los Angeles, California 90016

STRUCTURAL ENGINEERS:
J. MILCZEWSKY
and ASSOCIATES
3275 E. DATE ST.
BREDA, CA. 92823
(714) 335-1289 BUS
(714) 484-8012 FAX

JOB NUMBER 10-048

CONTROL BUILDING
SCHEDULES

DWP DRAWING NUMBER

DESIGNED

DRAWN

CHECKED

APPROVED

-

BAP

JAM

-

DRAWING NUMBER

A7.1